PS-731 Digital Cam with LCD Order code

Nov-02-2023


				CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8	
PS731	-	04	15	18	D	D	D	-	-	A	A	A	- W

-W: After October 21, 2023, the number of teeth on the pulley will be 22.

・Language specification(P)
Change panel language.
-: Japanese E: English

・Encoder cable (L2)
Make a selection of length of the cable which connects rotary encoder and PS-731.

50: 50cm	03: 3m	07: 7m
01: 1m	04: 4m	10: 10m
02: 2m	05: 5m	




・The output element
Selection of cam output


D: DC-SSR(5～24VDC 0.5A)
A: AC-SSR(75～240VAC 1A)
－: unnecessary

・Pulley for press side (D)
Make a selection of the pulley mounted on the shaft of the press depending on the shaft

08: φ8	12: φ12	16: φ16
09: φ9	14: φ14	18: φ18
10: φ10	15: φ15	

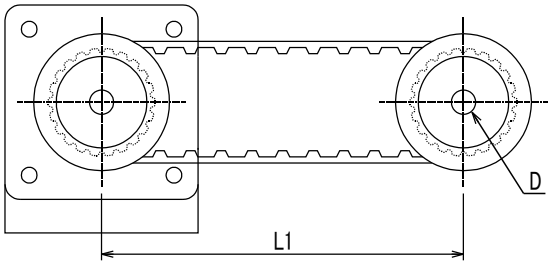

Encoder assembly(ECD-03A)

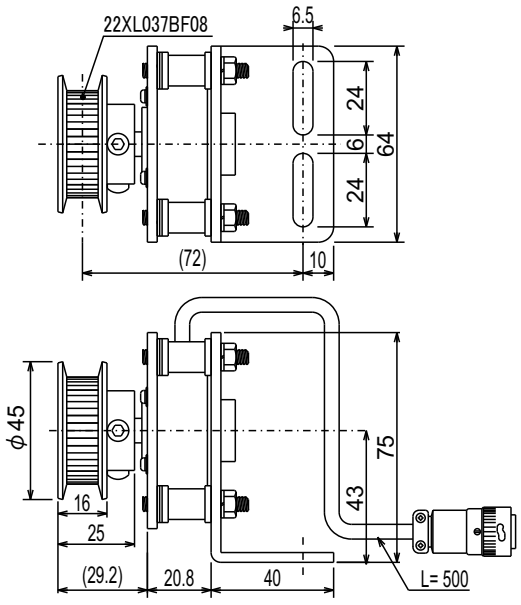

Timing belt (L1)
Make a selection of the timing belt according to the distance between the encoder and the shaft of the press.

	Distance of shafts(L1)
84: 84XL037	50mm
90: 90XL037	58mm
11: 110XL037	83mm
15: 150XL037	134mm
19: 190XL037	185mm
22: 220XL037	223mm

Standard attachments

・Instruction Manual(Japanese)
(English instruction manual added for English specifications)
・20-core wiring cable (5m)
・Mark tube 16pcs(8CH × 2pcs)
・Label seal

Please contact our sale department for inquiries or information.

SUGIYAMA ELECTRIC SYSTEM INC.
Head Office: 611Man-cho Nakagawa-ku Nagoya Aichi 454-0872 Japan TEL: 81-52-363-0501 E-mail:sales@sugiden.com